


Hylte Pocket

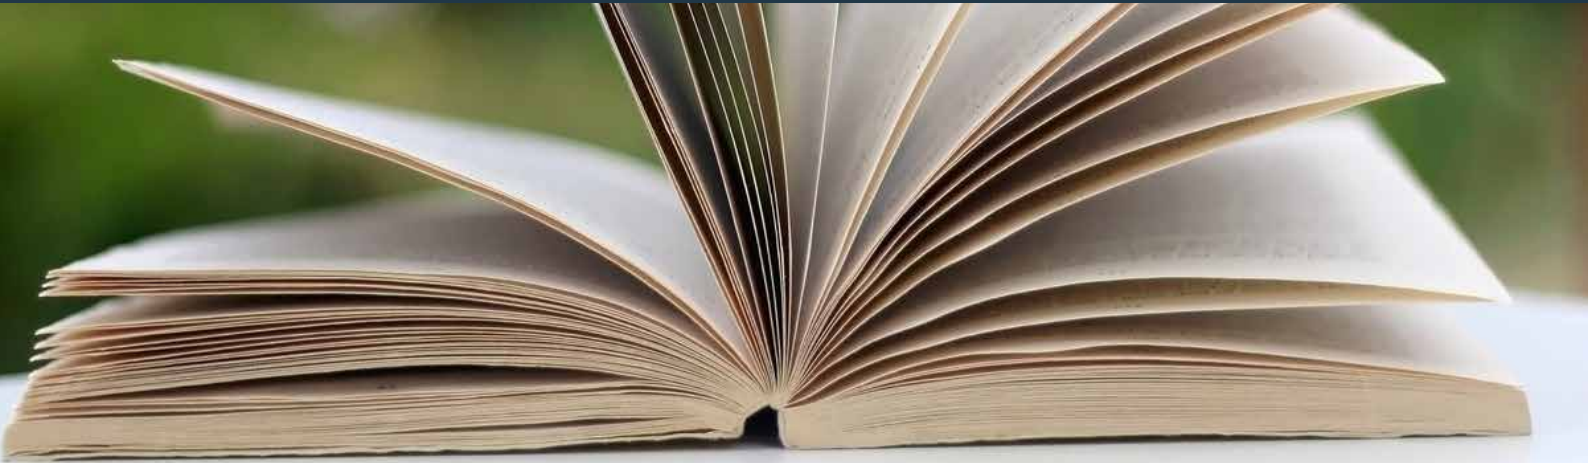

Hylte Pocket is a high-quality book paper.

- Outstanding runnability
- Made from 100% thermomechanical pulp.
- Great readability

TYPICAL END USES

Pocket books
Tear-off calendars
Puzzle books.

PRINTING METHODS

CSWO
HSWO
Inkjet

CERTIFICATES

Quality ISO 9001
Environment ISO 14001
Health & Safety ISO 45001
Energy ISO 50001
EU Eco label

REEL SPECIFICATIONS

Reel width: 310-2400 mm
Reel diameter: 1250 mm
Core: 76 mm
Max trimmed width: 8400 mm

L* 88.0
a* 0.4
b* 1.8

ISO 5631-1 (C/2°)

TECHNICAL SPECIFICATIONS - (target values)

Bulk 1.6								
Substance	ISO 536	g/m2	49	52	55	60	65	70
Brightness	ISO 2470-1 (C/2°)	%	68	68	68	68	68	68
CIE Whiteness	ISO 11476 (C/2°)	%	64	64	64	64	64	64
Opacity	ISO 2471	%	92	94	94	94	94	94
Thickness	ISO 534	µm	78	83	88	96	104	112
Bulk 1.8								
Substance	ISO 536	g/m2	49	52	55	60	65	70
Brightness	ISO 2470-1 (C/2°)	%	68	68	68	68	68	68
CIE Whiteness	ISO 11476 (C/2°)	%	64	64	64	64	64	64
Opacity	ISO 2471	%	87	88	89	90	91	92
Thickness	ISO 534	µm	88	93	98	107	116	126

STORAGE AND HANDLING

The paper should be stored in a humidity and temperature controlled area at 50% relative humidity and room temperature between 19°C - 23°C. If stored in non-air conditioned warehouse, it is absolutely necessary to allow a stabilisation period in the print room. Open the protective wrapping at the moment of use.