


## Hylte Eco Copy

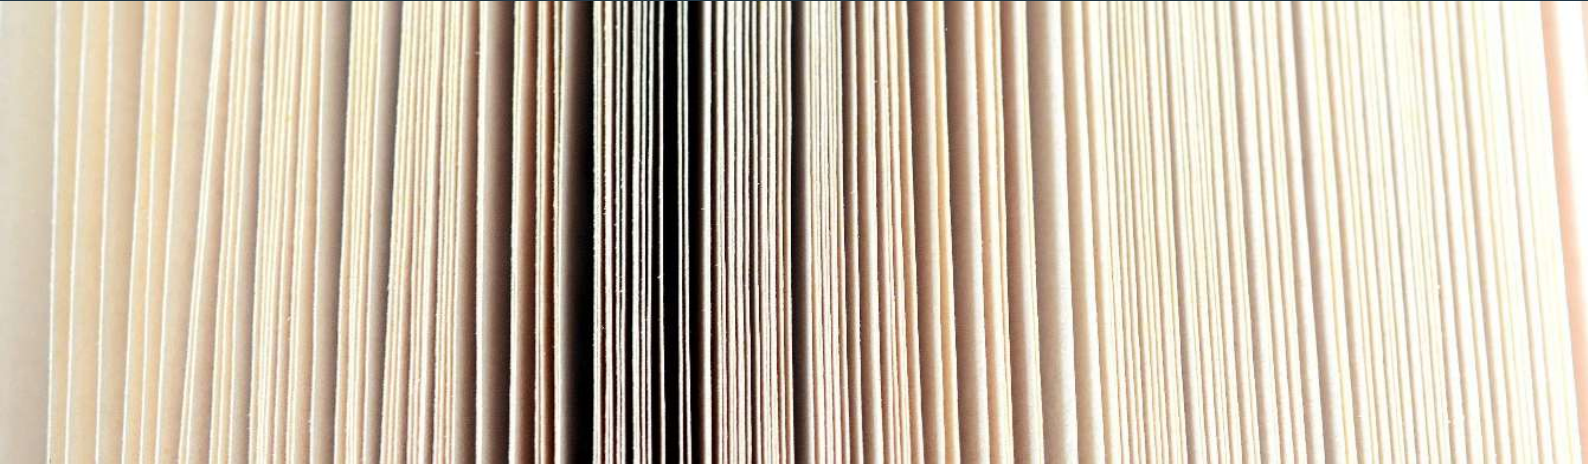

Hylte Eco Copy is an environmentally friendly copy paper with a very small climate footprint.

- Co<sub>2</sub> footprint only about 5-10% compared to standard woodfree paper!
- 97% of the fiber is used in contrast to 55% in normal cases
- Less Chemicals and no OBA in our paper.

#### TYPICAL END USES

Copy paper  
Printing paper

#### PRINTING METHODS

Office machines

#### CERTIFICATES

Quality ISO 9001  
Environment ISO 14001  
Health & Safety ISO 45001  
Energy ISO 50001  
EU Eco label  
FSC® C221886  
PEFC/05-35-366

Size A4 210 x 297 mm

L\* 92.0  
a\* -0  
b\* 9.5

ISO 5631-1 (C/2°)

### TECHNICAL SPECIFICATIONS - (target values)

Substance	ISO 536	g/m <sup>2</sup>	70	80
Brightness	ISO 2470-1 (C/2°)	%	70	70
Bulk	ISO 534	cm <sup>3</sup> /g	1.6	1.7
Opacity	ISO 2471	%	94	95
Thickness	ISO 534	µm	110	135
Smoothness	PPS 1MPa, ISO 8971-4	µm	4.0	5.0
Roughness	Bendtsen ISO 8791-2	ml/min	100	200
Moisture Content	ISO 287	%	4.7	4.7

#### STORAGE AND HANDLING

- The paper should be stored in a humidity and temperature controlled area at 50% relative humidity and room temperature between 19°C - 23°C.
- If stored in non-air conditioned warehouse, it is absolutely necessary to allow a stabilisation period in the print room.
- Open the protective wrapping at the moment of use.